

CNPM coupling panels

Description:

OPTOKON fiber optic coupling panels are manufactured from aluminum sheet metal and accommodate most common fiber optic couplings and hybrid adapters.

OPTOKON offers a series of high density coupling panels that fit all OPTOKON's fiber management products. These coupling panels are available with a variety of standard coupling styles in 6 and 8 counts. Custom coupling panels can be designed to suit your needs.

Features:

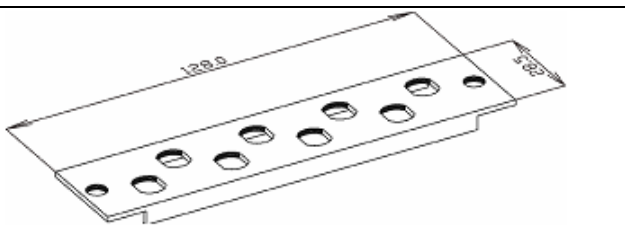
- All the most used adapters compatible
- High port density
- Singlemode and Multimode application
- SC footprint covers – E2000, SC, duplex LC types
- FC footprint covers – FC and ST types
- SC duplex and E2000 duplex available
- Other types on request



Application:

- OPTOKON Fiber Optic Cable management system

Specifications:

Dimensions	128 x 28.5 mm	
Distance between mounting screws	118.4 mm	

Ordering Code:

Fiber Optic Panels	Number of Adapters	Fiber Capacity
STANDARD		
CNPM – ST/FC – 06 (08)	6 (8)x ST and FC type	6(8)
CNPM – E2/SC/DLC – 06 (08)	6 (8)x E2000 and SC type 6 (8)x duplex LC type (SC footprint)	6(8) 12(16)
CNPM – DSC – 06	6x duplex SC type	12
CNPM – DE2 – 06	6x duplex LSH (E2000) compact	12
CNPM – 00	blank panel	0
CNPM – PG	panel for gland PG9	0
ON REQUEST		
CNPM – STP – 06	6 x RJ-45	6
CNPM – MJ – 06	6 x MT-RJ type	12
CNPM – DMU – 06	6 x duplex MU type	12
CNPM – DSC – 03	3x duplex SC type	6
CNPM – DLC – 06	6x LC duplex (not SC footprint)	12

Note: All coupling panels are silver in color. The other color is available only on request with big amount of pieces. Standard adapters fixation is by mounting clip. Screw fixation – on request.

Other adapters type – only on special request with higher MOQ.